


TP-108 Series Surface Mount Tape and Reel Test Points

Surface Mount, Tape & Reel Test Points



Specifications

Materials:

Contact Material: .010" x .040" Phosphor Bronze #510 Alloy

Finish: .0001 Matte Tin over .0001 Nickel or .0001" Min. Silver over .00005 Min. Copper

Tape Material: 8mm Wide;

Pitch: 4mm;

Conductive polycarbonate carrier meets ANSI/EIA-481 Standard


Reel Size: TP-108-02-1 = 7" diameter: 1000 pieces per reel

TP-108-02-5 = 13" diameter: 5000 pieces per reel

TP-108-02-8 = 13" diameter: 8000 pieces per reel

Pad Size: .070" x .135"

TP-108 Contacts

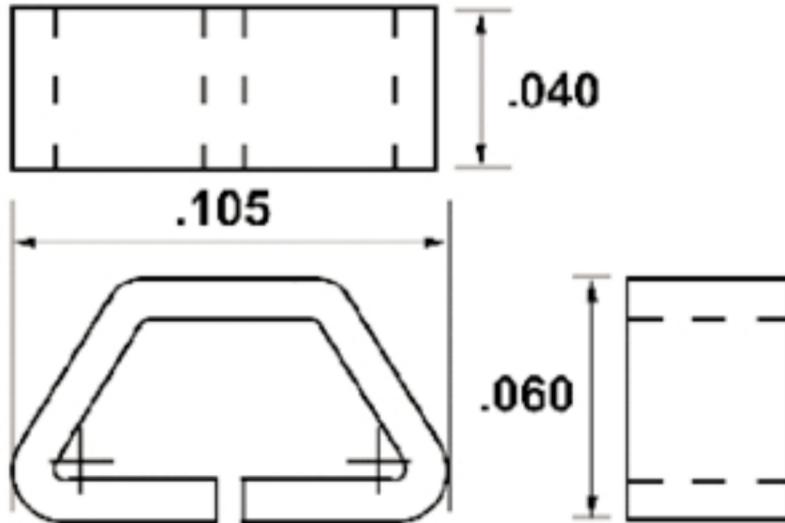

Ordering Information

Example:

TP-108 - **02** - **1** - **T**

●	●	●	●
●	●	●	●

● **Series Designation:**
TP-108

● **Packaging:**
02 = Tape-and-Reel Format

● **Quantity Per Reel:**
1 = 1,000 pieces
5 = 5,000 pieces
8 = 8,000 pieces

Example:

TP-108 - **02** - **1** - **S**

●	●	●	●
●	●	●	●

● **Finish:**
T = Matte Tin over Nickel
S = Silver over Copper

Product Description

Secure holding, user friendly, sub-miniature. The new TP-108 Series Surface Mount Test Point was designed to provide a secure anchoring point for miniature test points and j-hooks. The loop configuration of the TP-108 and all of Components Corporation's test point series holds probes fast, without the slippage and painful punctures common to posts or turrets. The TP-108's small footprint - about the same as a 1206 chip capacitor - and ultra-low profile are ideally suited for advanced surface mount printed circuit board applications. All of Components Corporation's line of surface mount and through-hole test points are field-proven, with applications ranging from consumer electronics to medical and aerospace technology and beyond.

The TP-108 is manufactured from spring tempered phosphor bronze flat wire using a proprietary process that yields a long life and absolute durability. The use of flat wire provides a larger surface area for mounting, important when considering the mechanical stresses common to the testing process. The standard TP-108 Test Point has a .0001 minimum matte tin finish over .0001 nickel underplate and is compatible with the reflow soldering process. The TP-108 is now available in silver plating for outstanding reliability.

Units are supplied in tape and reel format on 7" reels for automatic placement systems. The tape format is 8mm wide by 4mm pitch. Black conductive carrier tape conforms to the ANSI/EIA-481 standard.

Certificate of Compliance with Directive 2011/65/EU RoHS and EU Regulation EC 1907/2006

This is to certify that Components Corporation designs, manufactures and supplies products to our customers that are in compliance with Directive 2011/65/EU RoHS and EU Regulation EC 1907/2006, 84 SVH. This also pertains to procurement of raw material, component parts and processes.